


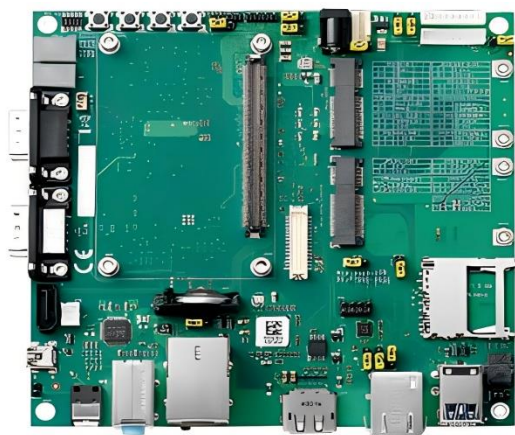

FEATURES

- Carrier board Type 10 modules (excluding nano-TC/TCR).
- 2x USB 3.0, 2x USB 2.0, and 1x USB client.
- Supports DisplayPort and LVDS (eDP optional).
- 1x SD card slot.
- 2x Mini PCIe card slots (one supports mSATA cards).
- 2x RJ-45 LAN connectors.
- Conforms to COM Express Carrier Design Guide rev. 2.0.
- Supports Smart Battery and 19V adapter power supply.

ACOM-12006	
FORM FACTOR	PICMG® COM Express® Revision 2.1
DIMENSION	150 mm x 142 mm
BIOS	Onboard diagnostics for BIOS POST code data and address on LPC bus
RAM	1x socket onboard
ETHERNET	2x LAN supports, 10/100/1000BASE-T compatible RJ-45 on I/O panel
DP	1x onboard header
SATA	1x SATA connector
USB	2x USB 3.0 on I/O pane, 2x USB 2.0 on I/O panel, 1x USB client
LVDS	1x onboard header
COM EXPRESS	1x 220-pin (Type 10)
SERIAL	2x DB-9 on I/O panel
AUDIO	Realtek ALC262 on DB-Audio2 daughter board (optional)
SM BUS	1
I2C	1
GPIO	GPIO 8-pin header
POWER INPUT	19V adapter power supply
POWER SWITCH	Reset button, Lid button, Sleep button, Power button, Power LED, HDD LED
CERTIFICATIONS	CE, FCC
WARRANTY	2 Years